


CERAMIC BACKING BAR




CBRAD100MM


Half Circle with groove <21 x 25 mm>, 100 mm radius

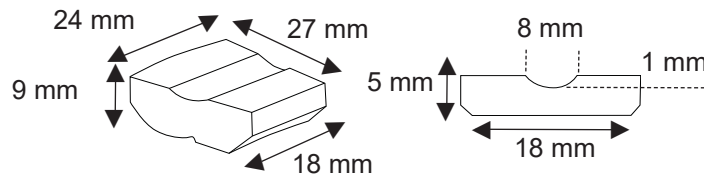


Round



CBRD6MM CBRD12MM
CBRD8MM CBRD15MM

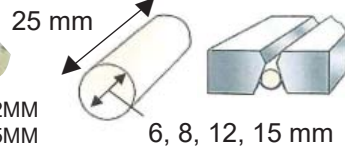


Triangular <20 x 17 mm>

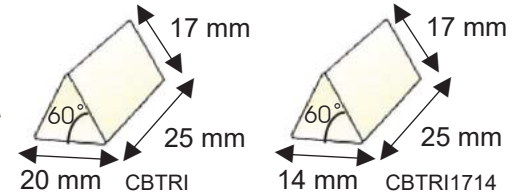

Rectangular without groove <25x25x6.5 mm>




CBFL25256

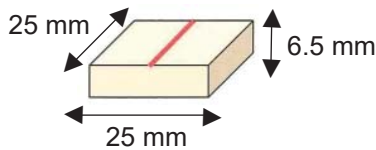


Rectangular with groove <28x25x8.5 mm>



CBGR25288

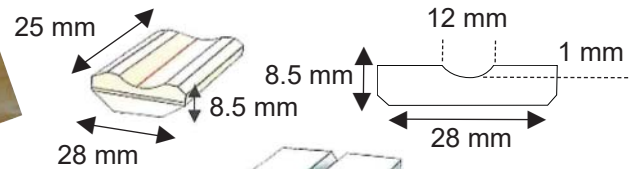

CBGR25206

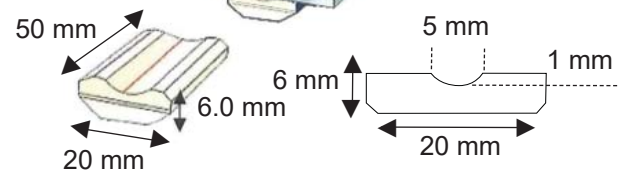

- Above are our standard specifications for each small pieces, and stick on Aluminium foil of 60 cm each.
- Other special sizes can be made upon customer request.

FIBACK FIBERGLASS WELD BACKING TAPE

Fiback Fiberglass Weld Backing Tape is an innovative substitute for traditional back purging methods that provides protection to the backside of the weld environment.



- Eliminates the need for back purging, increasing weld productivity and reducing labour costs.
- Suitable for stainless steel, carbon, duplex and chrome steels as well as other metals.
- Consistent in thickness, Fiback creates a continuous bead, ideal for lengthy applications.
- Saves gas as well as down time, allowing the user to bypass filling large structures; such as pressure vessels and bore pipes with argon.
- Significantly reduces post-weld clean up time.
- Perfectly compatible with orbital welding machines.
- Suitable for SMAW (stick), TIG and MIG welding processes.

AFBT-2.5-200 Light Duty Fiback Weld Backing Tape 200 amp 63 mm x 25 m

AFBT-2.5 Heavy Duty Fiback Weld Backing Tape 600 amp 63 mm x 12.5 m

AFBT-4.0-200 Light Duty Fiback Weld Backing Tape 200 amp 101 mm x 25 m

AFBT-4.0 Heavy Duty Fiback Weld Backing Tape 600 amp 101 mm x 12.5 m